

WHEN CUSTOMISATION, MODULARITY, AND RELIABILITY **ARE KEY**



A SMALL PUMP WITH GIGANTIC POTENTIAL

It was once said that great things come in small packages. When you meet the Grundfos CM/CME pump for the first time, you'll certainly agree. This horizontal multistage pump has been created with compactness and modularity as two of its central features. Add reliability and quiet operation to the mix, and another innovative pump solution from Grundfos is born.

The Grundfos CM/CME is designed to be used in a variety of applications. These include

- Washing and cleaning
- Temperature control
- Water treatment
- Chemical and pharmaceutical industries
- And more...

Three main models are offered with a number of variants available thanks to a series of optional components. These main models are constructed in:

- Cast iron (Type A)
- AISI 304/DIN 1.4301 (Type I)
- AISI 316/DIN 1.4401 (Type G)



Water treatment



Chemical and Pharmaceutical industries



Pressure boosting



Temperature control



Washing and cleaning

THE CM/CME ABBREVIATION DERIVES FROM THE MOST BASIC DESCRIPTION OF THE PUMP:

Centrifugal Modular. The pump is basically composed of a series of interchangeable modules, all of which have been designed to work together seamlessly, whatever the application.

The CM/CME pump is primarily used as a built-in pump in OEM solutions. Its compactness and flexibility make it an optimal solution for installation and interaction with other components in a larger product. It can also be used as a system pump, connected in complete system solutions or even as a stand-alone pump.

Wide temperature range
Thanks to the numerous configuration possibilities and range of materials, the Grundfos CM/CME pump can operate over a wide range of temperatures: from -30°C to 120°C. If you require different pumps for different applications, this flexibility and streamlining helps keep maintenance and spare parts costs to a minimum.



CM 1-3-G



CM 5-2-I



CM 3-8-A



CM 5-4-I



CM 10-8-G



CME 3-2-I



CM 3-2-A



CM 5-8-A



CM 3-2-A

ALL YOU'VE EVER WANTED, IN A SIZE YOU APPRECIATE

Innovation is at the heart of all Grundfos product solutions. And the Grundfos CM/CME pump is no exception. But innovation sometimes requires more than marching to the beat of your own drum. We have listened to customer feedback and have incorporated this into the product.

Compactness

Certain dimensions have been reduced by more than 30% compared to corresponding pumps without compromising the overall pump performance.

The Grundfos CM5-4 features for example dimensions that take up less physical space:

- Width: reduced by over 30%
- Height: reduced by almost 25%
- Length: reduced by almost 10%.

Reducing the pump dimensions was only possible due to the use of advanced processes and technologies.

Reliability

The Grundfos CM/CME has high reliability built in. A well-defined and rock-solid clamping of the pump impellers combined with a NORD-LOCK washer at the other end of the pump stack creates a robust and reliable design.

And what is more, industry-wide problems with shaft seals sticking where SIC-SIC seal faces are used have been eliminated. The new CM/CME solution builds on both the implementation of a rotation stop on the stationary ring and the presence of different surfaced finishings on the stationary and the rotating ring.

New CM self-priming

The CM pumps now also come in a self-priming variant. The CM self-priming pumps can create a suction lift of up to 8 metres in less than 5 minutes when the pump is installed and commissioned correctly.

Flexibility

The Grundfos CM/CME pumps are designed for use in a variety of applications, including:

- **Washing and cleaning**
Degreasing and washing of production equipment
Washing machines
Mobile washing units
Units for CIP (Cleaning In Place)
- **Temperature control**
Electronic data processing
Laser equipment
Industrial refrigeration
Heating and cooling in industrial processes

Flexible range of connections

A flexible range of connections ensures that the customer can utilise the connection systems in his or the end-user's solution. This provides an excellent flexibility and simplicity, creating a customised solution without the normal waiting time.

Connections include:

- Standard thread NPT or Rp
- A combination flange with your choice of flange in DIN, JIS and ANSI standards
- A PIE connection, particularly well-suited for high-pressure applications
- A Tri-clamp solution

New E-motors

- CME now with the state-of-the-art E-drive, featuring IE4 efficiency incl. VFD.
- The compact CME design is now available with up to 2.2 kW with many new features which enable tailor-made operation and customer benefits. The new design is also even more reliable.
- From August 2016, also available above 2.2kW.

Chemical and Pharmaceutical industries

- Distilling systems
- Dosing/Mixing
- Evaporation
- Liquid boosting and transfer

Materials

Different materials suit different applications. The modular concept of the Grundfos CM/CME pump allows you to select the material that best suits your needs.

Cast iron

Solid and reliable, it is perfect for washing and cleaning, pressure boosting and chillers.

ANSI 304/DIN 1.4301 stainless steel

ANSI304 stainless steel is the perfect choice for water and non-corrosive liquids used in water treatment, temperature control, pressure boosting, and washing and cleaning.

ANSI 316/DIN 1.4401 stainless steel


ANSI 316 stainless steel offers high corrosion protection against aggressive liquids used in chemical, pharmaceutical, food & beverage and water treatment applications.

Quiet operation


CM/CME pumps are often used in small spaces where loud operation is undesirable. Aside from sounding better, quiet operation eliminates the need for extra insulation around the product.




THE DETAILS MAKE THE DIFFERENCE




The broad motor programme is available for global usage. It contains both single- and three-phase motors, including Ex-versions and a wall-mounted VFD solution. Grundfos motors are or can be directly protected by Moxon, PIC and PT100 or by the frequency drive itself. The motor is IP55 as standard, and we also have a solution for condensing environments.




Installation indicator
A standard feature on all three-phase CM/CME pumps. It shows whether the motor has been connected properly. Remember: Your installation runs better when the pump rotates in the right direction.




A double protection device for our motor bearings is in place to minimise maintenance. Remember: You can rely on Grundfos for top performance, even in harsh environments.



Our goal of compact and easy handling is realised with the new CM/CME pump design. Remember: Compactness allows the CM/CME pump to fit in everywhere.



Stainless steel hydraulics across the entire range provide the highest performance in the long term. Pump variants are available in AISI 304, DIN 1.4301 and AISI 316/DIN 1.4401 stainless steel.

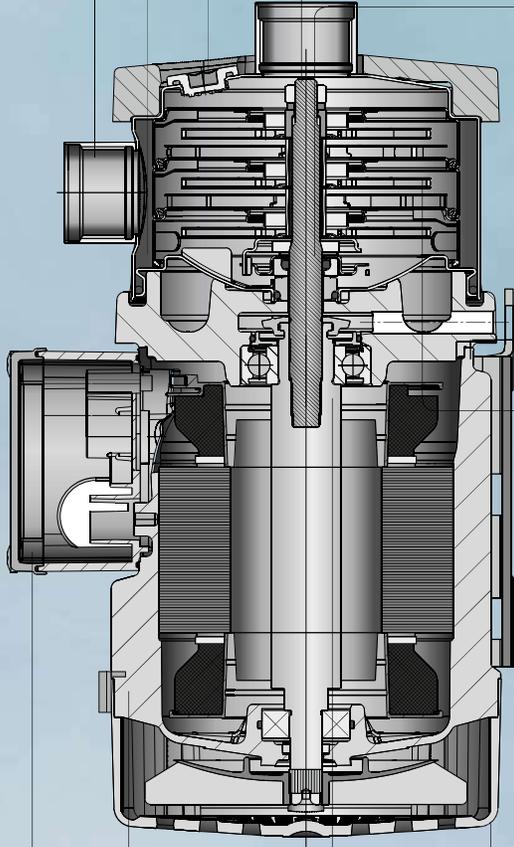






The suction and discharge ports are designed to withstand corrosive liquids. NPT and RP threading are standard, facilitating the use of a wide range of threaded flange and clamp adapters. Remember prepared for O-ring. However you prefer to put things together, Grundfos makes it easy.

Our sleeve O-ring assembly device features a safe and simple design for temperatures from -30°C to $+120^{\circ}\text{C}$. Remember that Grundfos CM/CME pumps can handle both cooling and heating applications.

The Grundfos filling and draining plug is sealed by an O ring which eliminates leakage.

A highly reliable combination of joint elements keeps the pump in shape and enables assembly and disassembly from the pump side only. And scheduled service is easy and fast.

A unique O-ring shaft seal is designed to provide excellent dry running, non-sticking capabilities. Remember: Under tough conditions, Grundfos CM/CME provides extra high reliability.



From end to end, Grundfos' proven quality and attention to detail is the difference between Grundfos CM/CME and competing pump solutions.

Power
0.25 - 7.5 kW
0.3 Hp - 10 Hp

Flow
50Hz
1m³/h - 25m³/h
60Hz
1m³/h - 30m³/h
4-48gpm - 132gpm

Temp
 -30°C - $+120^{\circ}\text{C}$
 -22°F - $+248^{\circ}\text{F}$

Pressure
Head: 12 bar/174 PSI
System pressure: 16 bar/232 PSI