



Product: Tank Screens

Code: TASS20 - Standard 8"
TASS06 - Standard 12"
TATS01 - Standard 16"


Product

Unless rainwater enters the tank / cistern through pipes that are connected directly to the top or side of the tank, you must ensure all water passes through a tank screen at tank entry point. The tank screen must include a non-corrosive screen of not more than 3/64" to keep mosquitoes and pests out.


Features and Benefits

- Mosquito proof 316 stainless steel mesh and 1/32" aperture.
- Manufactured from UV stabilized polypropylene.


Standard 8" Tank Screen

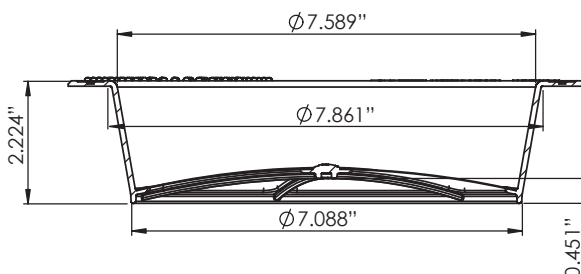

Standard 12" Tank Screen

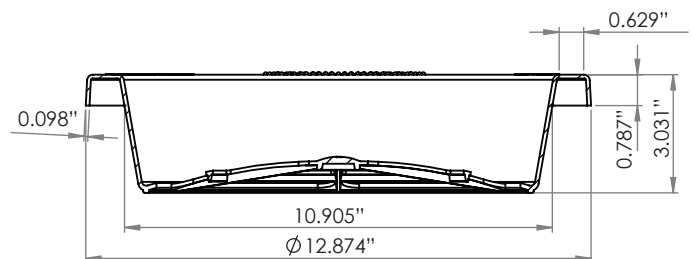

Standard 16" Tank Screen

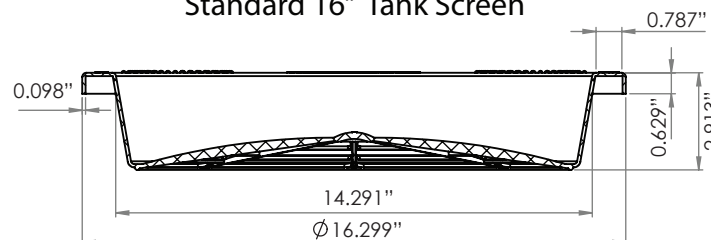

Maximise Catchment Efficiency

- Rain Heads fitted at each downspout that supplies water to the tank to filter out leaves and debris.
- First Flush Water Diverters fitted 'upstream' of the tank screen to optimize water quality.
- The Tank Screen should provide the final point of protection not the only barrier for leaves, debris and pests.
- Tank Screen Covers can also be used to capture any splash from increased flow into the tank.

DISCLAIMER This product specification is not a complete guide to product usage. Further information is available from Rain Harvesting Pty Ltd and from the Installation and Operating Instructions. This specification sheet must be read in conjunction with the Installation and Operating Instructions and all applicable statutory requirement. Product specifications may change without notice. © Rain Harvesting Pty Ltd