
## **BRIMFUL CAPACITY: 15000 GALLONS**

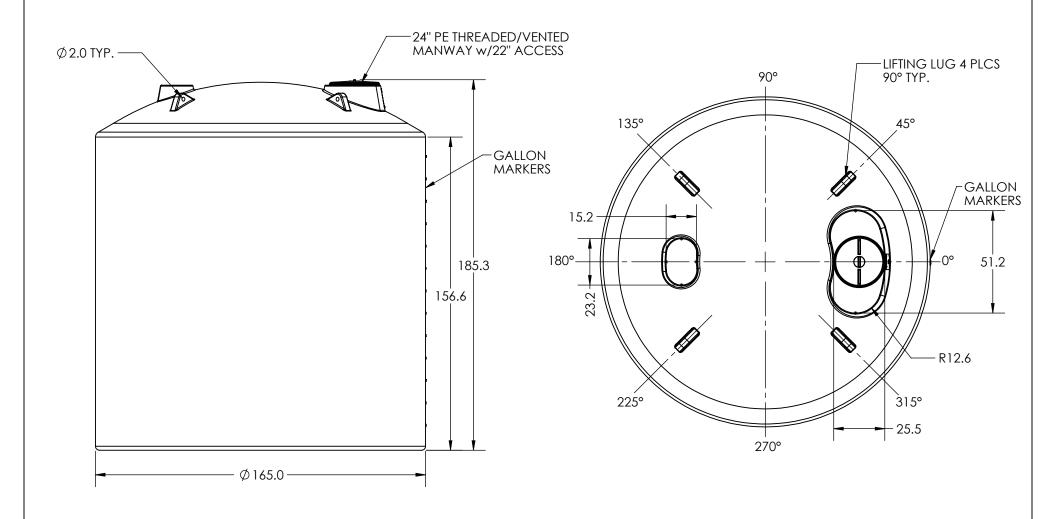

## NOTE:

## GALLON MARKERS MAY BE REMOVED FOR FITTING PLACEMENT AS NEEDED

\*ALL EXTERNAL PIPING MUST BE INDEPENDENTLY SUPPORTED.

\*ONLY BASE FITTINGS TO BE LEFT INSTALLED AT TIME OF SHIPMENT PER SII PROCEDURE.

\*Consult Snyder's Guidelines for Use and Installation prior to delivery.

Available on-line at <a href="http://www.snyderindustriestanks.com/Technical">http://www.snyderindustriestanks.com/Technical</a>

ALL DIMENSIONS ARE IN INCHES NOMINAL & SUR IECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS ARE IN INCHES, NOMINAL, & SUBJECT TO CHANGE WITHOUT NOTICE.
ALL DIMENSIONS ON ROTATIONAL MOLDED PARTS ARE SUBJECT TO A + 3% TOLERANCE

	DO NOT SCALE	DRAWN BY	OH CHVDER	TITLE:			REVISION
STATUS:	Released	BH	INDUSTRIES, INC.	ASM TK	13800V	/ X 165 NH	A
	© SNYDER INDUSTRIES INC., 2017						SHEET 1 OF 1
ALL DIMENSIONS, DESIGNS, AND INFORMATION ON THIS PRINT MUST BE CONSIDERED PROPRIETARY TO SNYDER INDUSTRIES, INC. AND MAY NOT BE USED, COPIED, OR DISTRIBUTED WITHOUT WRITTEN PERMISSION OF AN OFFICER (OR HIS AGENT) OF THE FIRM.			(402) 467-5221 www.snydernet.com	PART NO. 303010		D006817	