



IC Series

Constant Pressure Inverter Control System



Walrus America Inc

ISO 9001 Certified

TPHIC Series Constant Pressure Inverter Control System

Explanation	Page
Applications	3
Suitable Liquids	3
Application Conditions	3
Product Features	3
Model Code	3
Accessories	3
Performance Curves - Simplex	4
Performance Curves - Duplex	4
Specifications & Dimensions	
TPH 2T/4T IC	5
TPH 8T/12T IC	6
TPH 25T/50T IC	7
TPH 2T/4T IC x2	8
TPH 8T/12T IC x2	9
TPH 25T IC x2	10
TPH 50T IC x2	11

Walrus TPHIC series is a system that combines pump and inverter control panel to provide a constant supply of pressurized water. It is available in simplex and duplex pre-engineered design with standard and optional features.

Applications:

Boost a constant water pressure for apartment buildings, motels, factories, houses, irrigation systems, water filtration systems, HVAC systems, etc.

Suitable Liquids:

Potable water or other clean, thin or non-aggressive liquids.

Application Conditions:

Ambient temperature: Max. +104°F (+40°C)

Liquid temperature: +39°F ~ +104°F (+4°C ~+40°C)

Inlet pressure: Lower than the constant pressure setting limit (see page 5~11)

Product Features:

The pump will start smoothly when the tap is open and will continue to run when water is in use. It will stop when system is in max pressure and the water flow is stopped. The pressure is transmitted by pressure sensor for normal auto on-off operation. The factory has preset the pressure according to each rating and it is adjustable by changing the program in the inverter controller. Pump will always provide the constant pressure; although the motor speed will be varied by the different operating flow rate.

Dry run protection:

The pump will automatically shut off when it is in dry run. When the discharge cannot reach the set pressure, or the liquid temperature exceeds 131°F (55°C), the pump will stop. It will resume operation when the water supply is back up or the liquid temperature drops to below 104°F (40°C).


Pressure compensation for pipe leak:

The pump will compensate the pressure loss due to the leak in the system. When the system leak has dried out the water in the pressure tank, the pump will automatically start to fill up the tank.

Duplex system operations:

The lead pump shall run continuously to maintain system pressure. When the lead pump is unable to maintain system pressure the lag pump will be called on and will operate in parallel with the lead pump. When one pump can handle the system demand the controls will shut down the lag pump. Pump alternation is accomplished with a 24-hour time clock.

Model Code:

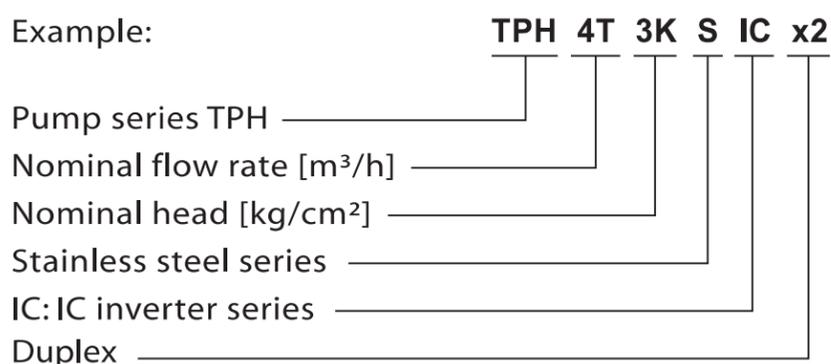


Accessories:

Subject to added cost, Walrus is able to supply the following accessories:


1. The inlet header for Duplex systems.
2. The shut off valves for inlet and outlet.

TPHIC Series Constant Pressure Inverter Control System

Performance Curves - Simplex

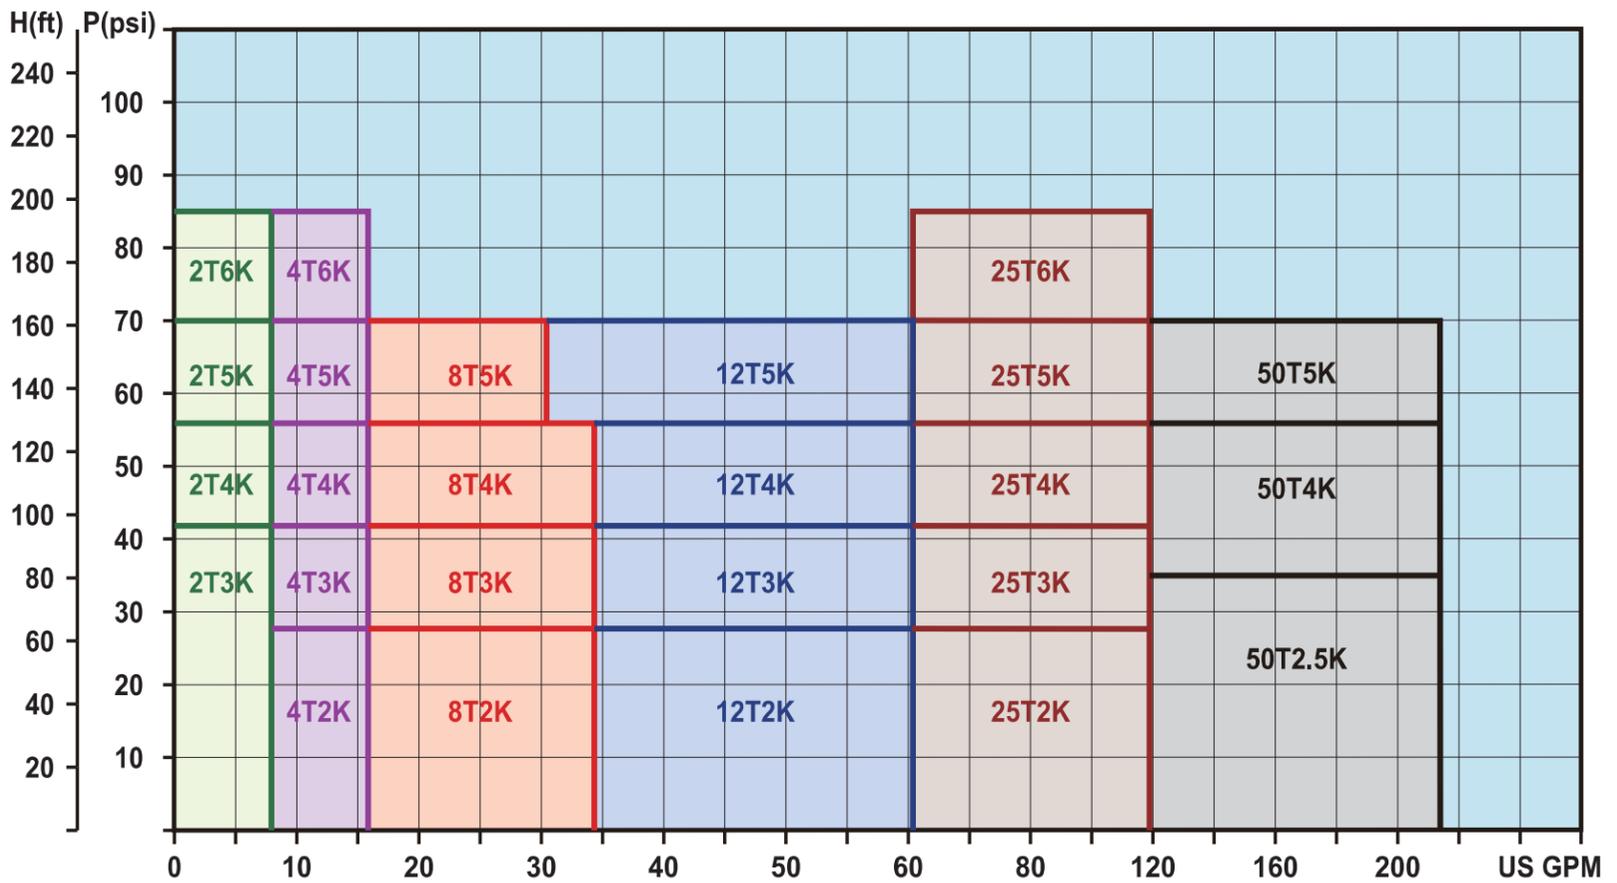

Performance Curves - Duplex

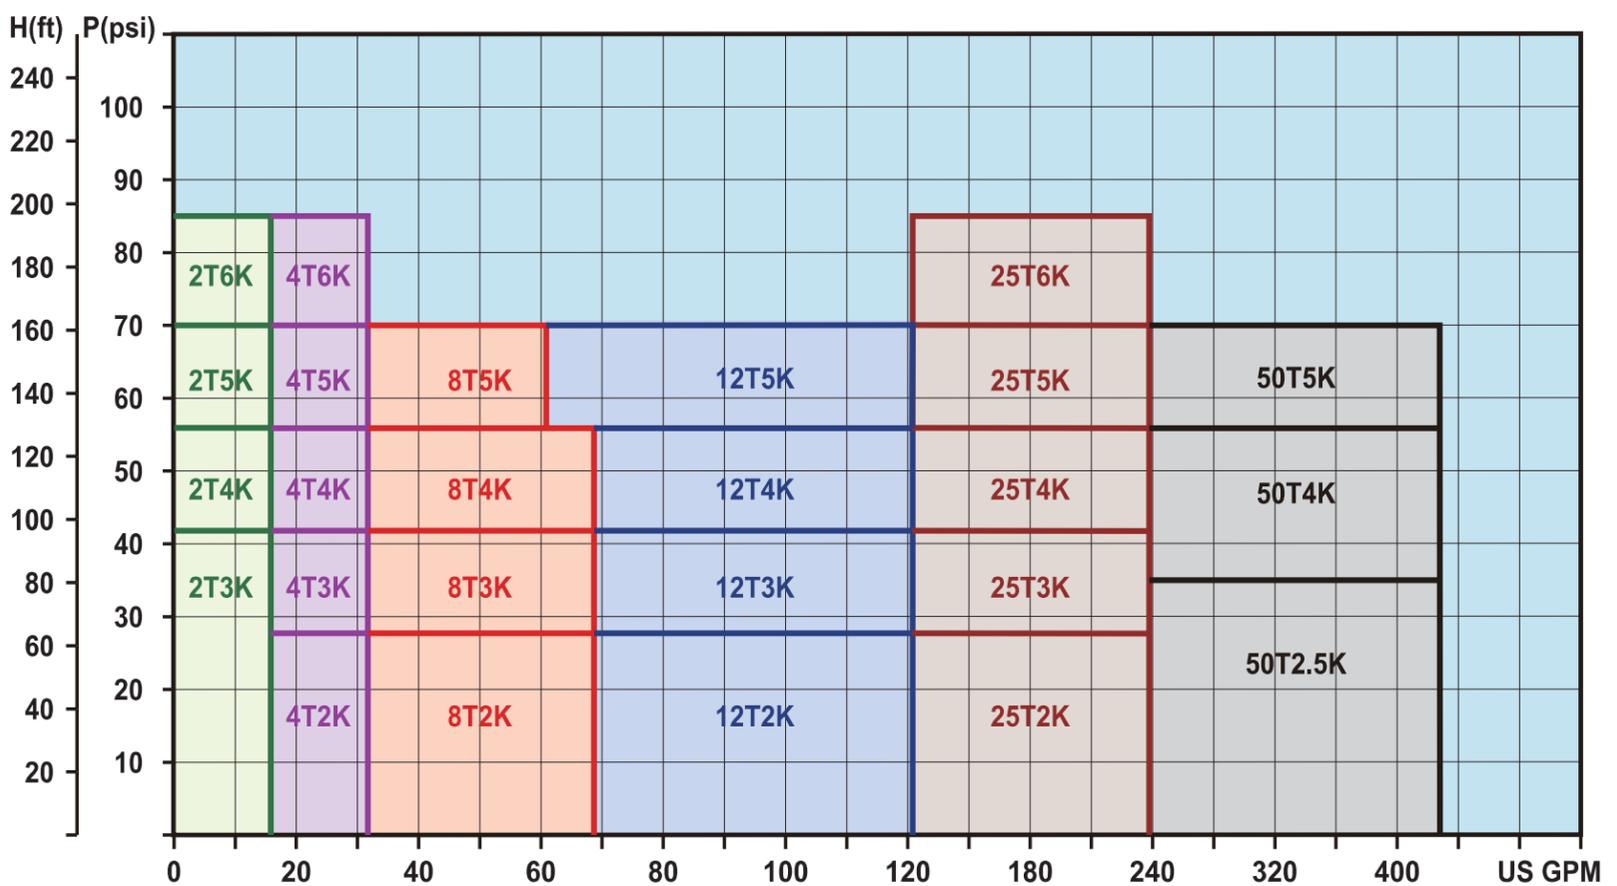


Specifications - Simplex

Model	Inverter Controller		No-Fuse Breaker (A)	Pre-set Pressure (PSI)	Inlet (NPT)	Outlet (NPT)	Nominal Set Head (ft)	Nominal set Flow (GPM)
	Output Power (HP)	Voltage (V)						
TPH2T3K(S)IC	1	1Ø 115V / 1Ø 230V / 3Ø 230V	15/ 10/ 5	42	1"	1"	98	8
		3Ø 460V	5					
TPH2T4K(S)IC	1	1Ø 115V / 1Ø 230V / 3Ø 230V	15/ 10/ 5	56	1"	1"	130	8
		3Ø 460V	5					
TPH2T5K(S)IC	1	1Ø 115V / 1Ø 230V / 3Ø 230V	30/ 15/ 10	70	1"	1"	160	8
		3Ø 460V	5					
TPH2T6K(S)IC	1	1Ø 115V / 1Ø 230V / 3Ø 230V	30/ 15/ 10	85	1"	1"	196	8
		3Ø 460V	5					
TPH4T2K(S)IC	1	1Ø 115V / 1Ø 230V / 3Ø 230V	15/ 10/ 5	28	1½"	1½"	65	16
		3Ø 460V	5					
TPH4T3K(S)IC	1	1Ø 115V / 1Ø 230V / 3Ø 230V	30/ 15/ 10	42	1½"	1½"	98	16
		3Ø 460V	5					
TPH4T4K(S)IC	2	1Ø 230V / 3Ø 230V	15/ 10	56	1½"	1½"	130	16
		3Ø 460V	5					
TPH4T5K(S)IC	2	1Ø 230V / 3Ø 230V	20/ 15	70	1½"	1½"	160	16
		3Ø 460V	10					
TPH4T6K(S)IC	2	1Ø 230V / 3Ø 230V	20/ 20	85	1½"	1½"	196	16
		3Ø 460V	10					

** (S): Stainless steel series

Dimensions (in.)

• Fig. 1 TPH2T / 4T - IC

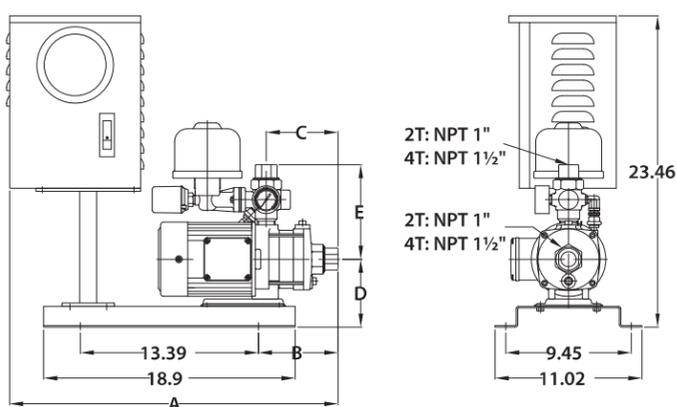

Model	A	B	C	D	E	Pressure tank (gal)	Fig.	N.W. (lb)
TPH2T3KIC	21.34	5.20	4.61	5.12	7.24	0.2	1	52.7
TPH2T4KIC	22.05	5.91	5.31	5.12	7.24	0.2	1	52.9
TPH2T5KIC	22.76	6.61	6.02	5.12	7.24	0.2	1	56.2
TPH2T6KIC	23.46	7.32	6.73	5.12	7.24	0.2	1	56.4
TPH4T2KIC	22.13	5.98	5.39	5.12	7.24	0.2	1	50.9
TPH4T3KIC	23.15	7.01	6.42	5.12	7.24	0.2	1	54.5
TPH4T4KIC	24.21	8.07	7.48	5.12	7.24	0.2	1	58.2
TPH4T5KIC	25.28	9.13	8.54	5.12	7.24	0.2	1	58.4
TPH4T6KIC	26.38	10.24	9.65	5.12	7.24	0.2	1	62.6

TPH 8T/12T IC


Specifications - Simplex

Model	Inverter Controller		No-Fuse Breaker (A)	Pre-set Pressure (PSI)	Inlet (NPT)	Outlet (NPT)	Nominal Set Head (ft)	Nominal set Flow (GPM)
	Output Power (HP)	Voltage (V)						
TPH 8T2K(S)IC	1	1Ø 115V / 1Ø 230V / 3Ø 230V	30/ 15/ 10	28	2"	2"	65	34
		3Ø 460V	5					
TPH8T3K(S)IC	2	1Ø 230V / 3Ø 230V	20/ 15	42	2"	2"	98	34
		3Ø 460V	10					
TPH8T4K(S)IC	3	1Ø 230V / 3Ø 230V	30/ 15	56	2"	2"	130	34
		3Ø 460V	10					
TPH8T5K(S)IC	3	1Ø 230V / 3Ø 230V	30/ 15	70	2"	2"	160	30
		3Ø 460V	10					
TPH12T2K(S)IC	2	1Ø 230V / 3Ø 230V	10/ 5	28	2"	2"	65	60
		3Ø 460V	5					
TPH12T3K(S)IC	3	1Ø 230V / 3Ø 230V	30/ 15	42	2"	2"	98	60
		3Ø 460V	10					
TPH12T4K(S)IC	5	3Ø 230V	20	56	2"	2"	130	60
		3Ø 460V	10					
TPH12T5K(S)IC	5	3Ø 230V	30	70	2"	2"	160	60
		3Ø 460V	15					

** (S): Stainless steel series

Dimensions (in.)

• Fig. 2 TPH8T /12T - IC

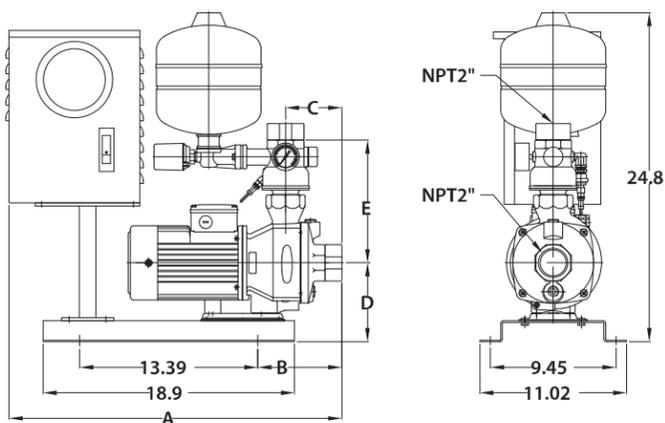

Model	A	B	C	D	E	Pressure tank (gal)	Fig.	N.W. (lb)
TPH8T2KIC	22.44	6.30	4.21	5.91	10.47	1.0	2	70.1
TPH8T3KIC	23.70	7.56	5.47	5.91	10.47	1.0	2	72.8
TPH8T4KIC	23.70	7.56	5.47	5.91	10.47	1.0	2	84.6
TPH8T5KIC	25.04	8.90	6.81	5.91	10.47	1.0	2	84.8
TPH12T2KIC	22.44	6.30	4.21	5.91	10.47	1.0	2	72.7
TPH12T3KIC	23.70	7.56	5.47	5.91	10.47	1.0	2	84.6
TPH12T4KIC	23.70	7.56	5.47	5.91	10.47	1.0	2	108.4
TPH12T5KIC	27.40	8.90	6.81	5.91	10.47	1.0	2	123.5